



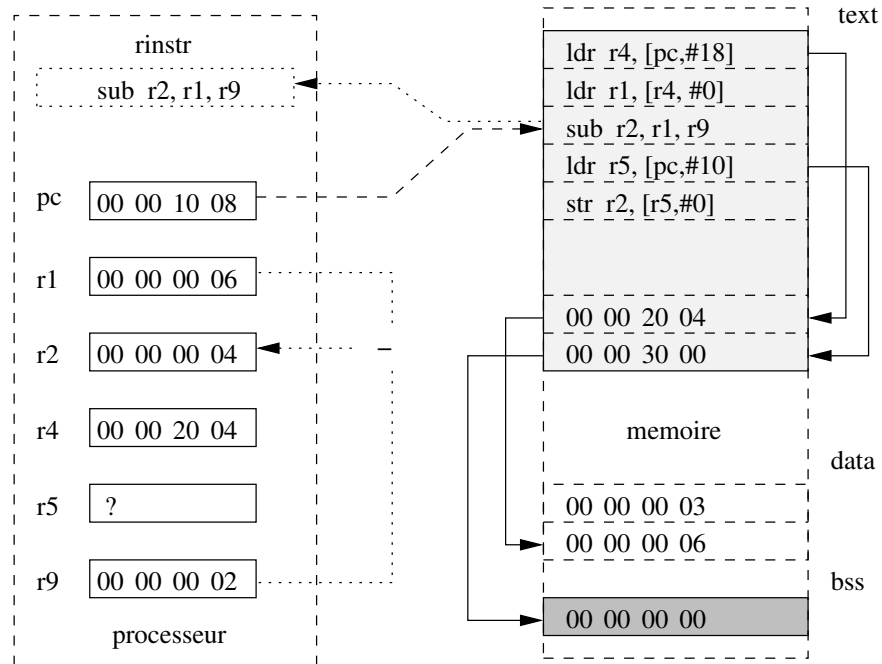

00001000	ldr r4,= etc_y	@ r4 = &x (r4 = 0x00002004)
00001004	ldr r1, [r4]	@ r1 = *r4 (r1 = Mem[r4])
00001008		
0000100C	mov32 r5,= etc_z	@ r5 = &z (r5 = 0x00003000)
00001010	str r2, [r5]	@ r1 = *r4 (r1 = Mem[r4])
00001020	.word etc_y	@ .word 0x00002004) (&y)
00001024	.word etc_z	@ .word 0x00003000) (&z)
00002000	etc_x	.word 3
00002004	etc_y	.word 6
00003000	etc_z	.skip 4

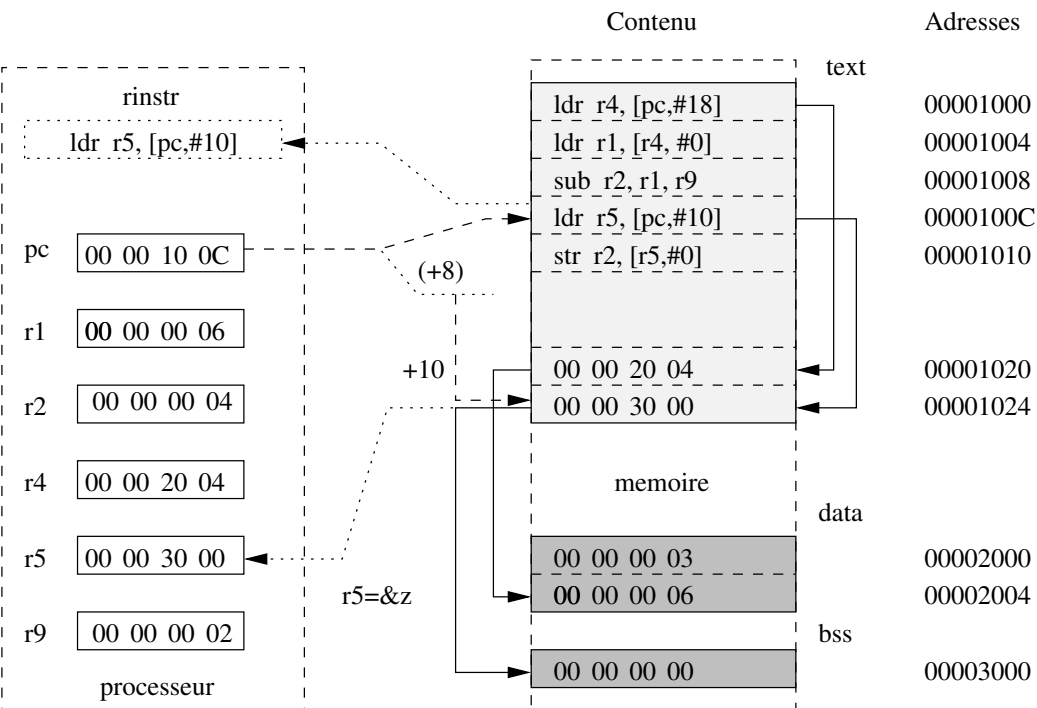

Adresses

00001000
00001004
00001008
0000100C
00001010
00001020
00001024
00002000
00002004
00003000

